

COMBI 25/30 FLEXP-WATER


ALL-IN-ONE PROCESSORS



MAIN FEATURES

In-line processor for flexo-water plates

- Simultaneous processing of the whole plate surface
- Main exposure with pump and vacuum gauge
- Fastening compartment on a table with permanent sticky plate
- Washout with an orbital and alternating movement. Independent movement of the table
- Main and post exposure section equipped with leds informing the status of the lamps
- Dryer separated by a special material which allows the lamp temperature maintenance at 45 degrees
- Touch screen PLC controller
- Water and dryer temperature control
- Detergent dosing pump
- Filtration system

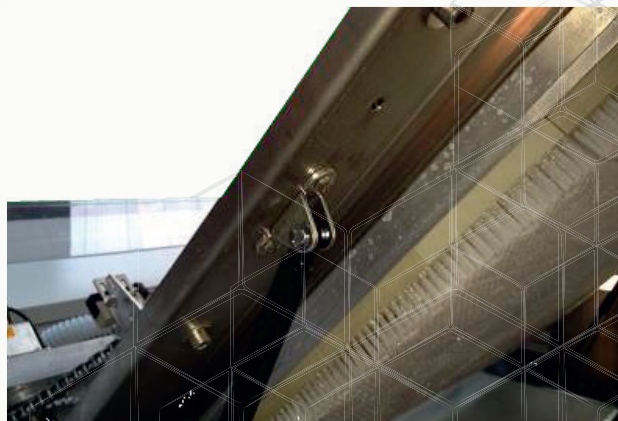

TECHNICAL DATA

25/30

**635x762 mm
25x30"**



Maximum Plate Size

7

Maximum Plate Thickness mm

210x126x110



Overall Dimensions LxWxH cm

740



Weight kgs

**400V 3PH+N+GND 50/60Hz
230V 3PH+GND 50/60Hz**



Power Supply

10,5 kW

110

Tank Capacity lt

13x60W 10R L. 900

UVA Exposure Lamps

11x30W L. 894

UVC Lamps

12x60W 10R L.900

UVA Post-Exposure